


AIR TOOL LUBRICANT



Air Tool Lubricant

Our Air Tool Lubricant is a specially formulated ISO 46 lubricant, which prolongs the life of air tools, cylinders and accessories, while allowing maximum performance. Our lubricant formulation inhibits the formation of rust, and is nondetergent, non-corrosive, nonreactive and stable (non-decomposing).

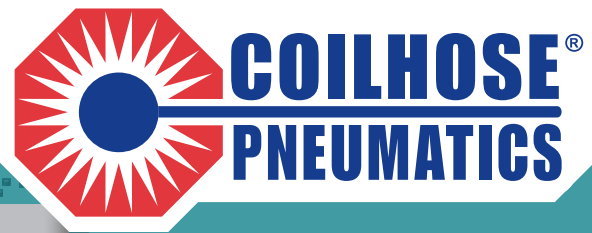

MODEL NUMBER	UNIT VOLUME	CASE QUANTITY
ATL004	4 oz.	12 bottles
ATL016	16 oz. (1 pint)	12 bottles
ATL032-P6	32 oz. (1 quart)	6 bottles
ATL032-P12	32 oz. (1 quart)	12 bottles
ATL128	128 oz. (1 gallon)	4 bottles
ATL55	55 gallon drum	n/a

Only available in case quantities as shown above.

Air Tool Lubricant Wintergrade

While many air tool lubricants quit working below freezing temperatures, Coilhose ATLW provides lubrication down to -45° F. ATLW Anti-Freeze Lubricant can be applied via conventional air line lubricators or directly into the air tool's air inlet port.



MODEL NUMBER	UNIT VOLUME	CASE QUANTITY
ATL004W	4 oz.	12 bottles
ATL016W	16 oz. (1 pint)	12 bottles
ATL128W	128 oz. (1 gallon)	4 bottles

Only available in case quantities as shown above.

WARNING: ATLW is not an additive and should not be mixed with other lubricants. This could result in a reduction of its de-icing and lubricating effectiveness as well as gumming of internal components.

- Lubricates and rust proofs
- Removes moisture
- Maximizes tool performance
- Avoids unnecessary service
- Prolongs tool life

Convenient "flip-up" pour cap
In the 4 oz., 16 oz., and 32 oz. sizes

Available in 4 oz., 16 oz., 32 oz., 128 oz. plastic bottles and in a 55 gallon drum



Works great with our lubricators!



COILHOSE PNEUMATICS
19 Kimberly Road, East Brunswick, NJ 08816
Ph: 732 390 8480 Fax: 732 390 9693
info@coilhose.com